

Sight

022625, 022626, 022627




The sight is used to point out the desired blasting direction.

Endless 360° movement range.

The transducer has 2 connectors for the CAN-Open communication including power supply

The device is built to be used in harsh environment where high accuracy is needed.

Normally used in a system together with other transducers to form a complete angle measuring instrument.

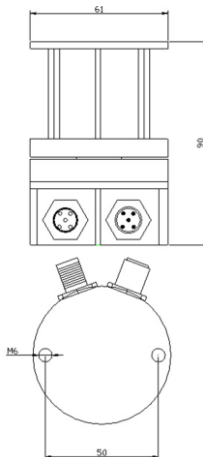


Technical data

Supply voltage	10 – 30 VDC
Power supply	<100mA
Measurement range	360°
Accuracy	Better than ±0,25°
Resolution	±0,001°
Bus Connection	CANOpen

Housing Steel housing, zinc plated
Mounting 2* M6 screws
Shaft Connection plate for multiple connection possibilities.

Connection Standard M12 A-code plug, 5 pin Male/Female

Operating temp. -40 - +70°C
Protection IP67



PIN	Signal
1	Not Connected
2	10..30V DC (Supply voltage)
3	GND / 0V
4	CAN_H (dominant high)
5	CAN_L (dominant low)